

SERIES AP 3571 & 4571

1/4 & 3/8 INCH SPRINGLESS DIAPHRAGM VALVES

Dual mode – metered or full open

- Soft start valve to minimize vacuum chamber pressurization turbulence
- Stainless steel 316L VAR secondary remelt construction
- Metal to metal seal to atmosphere
- Metered flow adjustable
AP 3571 – 10 to 200 slpm
AP 4571 – 10 to 350 slpm
at 80 psig of N₂
- Pneumatically actuated normally closed
- Two separate actuation ports – metered and full open
- Installation and operating instructions available at www.aptech-online.com in the Tech Briefs section

Operating Parameters – all valves

Inlet pressure	vacuum to 125 psig (8.6 bar)
Outlet pressure	vacuum to inlet pressure
Proof pressure	200 psig (13.8 bar)
Burst pressure	1,000 psig (68.9 bar)
Actuation pressure	70 to 110 psig (4.8 to 7.6 bar)

Other Parameters – all valves

Status	normally closed
Inlet /outlet connectors	1/4 or 3/8 inch face seal or tube weld
Actuation ports (2 ea.)	M5 thread, side ports, 180° apart, oriented in-line with mounting holes
Flow coefficient AP 3571	0.29, X _T = 0.6
AP 4571	0.5, X _T = 0.6
Internal volume	0.06 in ³ (1.07 cm ³)
Operating temperature	32° to 125°F (0° to 51°C)
Surface finish	15 μin. (0.4 μm) Ra max standard; 10 μin (0.25 μm); 7 μin (0.18 μm); and 5 μin (0.13 μm) optional
Inboard leakage	2 x 10 ⁻¹⁰ sccs
Outboard leakage	2 x 10 ⁻⁹ sccs He at 125 psig
Leakage across seat	4 x 10 ⁻⁸ sccs He at 125 psig inlet pressure

Flow Range Tolerance at 80 psig N₂ inlet, 0 psig outlet

10 to 20 slpm	+/- 6 slpm
21 to 50 slpm	+/- 10 slpm
51 to 100 slpm	+/- 15 slpm
101 to 200 slpm	+/- 20 slpm
201 to 350 slpm (AP 4571 only)	+/- 25 slpm

Materials

Series AP 3571 and 4571	
Wetted Parts	
Body	SS 316L secondary remelt
Finish	electropolished and passivated
Diaphragm	Elgiloy®
Seat	PCTFE

All specifications subject to change without notice.


Elgiloy® Elgiloy Corporation

BI-FLOW VALVE – METERED OR FULL OPEN CONTROL

DIMENSIONAL INFORMATION


MATERIAL	CONNECTION	A		B		C	
		in.	mm	in. [± 0.01]	mm	in. [± 0.01]	mm
S	FV4, MV4	1.12 sq.	28	1.39	35	–	–
	TW4	1.12 sq.	28	–	–	1.06	27
	FV6, MV6	1.12 sq.	28	1.93	49	–	–
	TW6	1.12 sq.	28	–	–	1.325	34

All dimensions in inches (mm). Metric dimensions are for reference only.

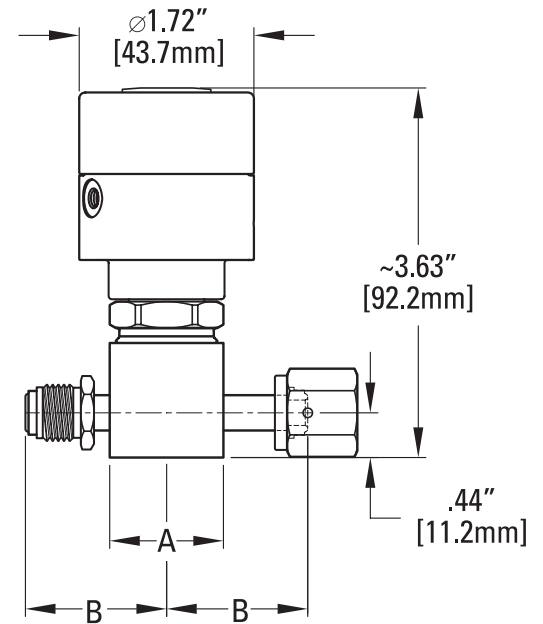


PORTING CONFIGURATIONS

Please refer to Technical Bulletin 203 for valve porting configurations.

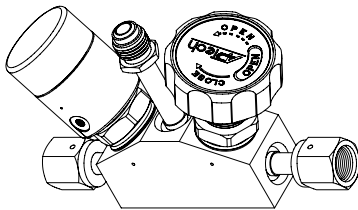

Multiport, monoblock and custom configurations available.

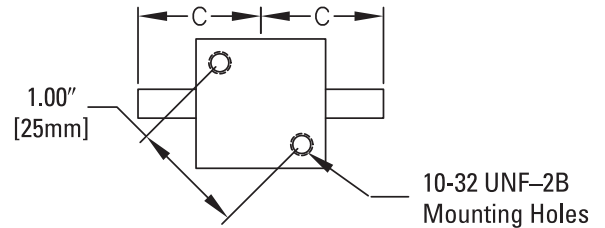

CAUTION: Product selection is the sole responsibility of the user, regardless of any recommendations or suggestions made by the factory. The user shall make selections based upon their own analysis and testing with regard to function, material compatibility and product ratings. Proper installation, operation and maintenance are also required to assure safe, trouble free performance.

ORDERING INFORMATION

Sample Order Number		AP 3571SM 2PW MV4 MV4 M050	
AP 3571 Series	AP 3571 AP 4571	MV4 MV4 Connections Inlet / Outlet	FV4 = 1/4 inch face seal female MV4 = 1/4 inch face seal male TW4 = 1/4 inch tube stub weld* FV6 = 3/8 inch face seal female MV6 = 3/8 inch face seal male TW6 = 3/8 inch tube stub weld *TW4 not available with AP 4571
S Material	S = Stainless steel (SS)	Options	1.75 = 1.75 inch face to face TW4 option
M Surface Finish Options	M = 10 μ in. Ra max V = 7 μ in. Ra max X = 5 μ in. Ra max	M050 Metered Flow	MXXX = Metered adjusted flow in slpm at 80 psig N ₂ Note: Replace XXX with flow rate using 3 digits, example 50 slpm = M050
2PW Ports	2PW = 2 ports 3PW = 3 ports 4PW = 4 ports 5PW = 5 ports Refer to valve porting guide for selection. Please refer to technical bulletin 206 for surface mount (IGS) options.		